


For connection to your Q-One directly to a broadband modem or Internet line, with no other router on the network. If you need to use it with another router, please refer to the User's Guide for more information.

1 Prepare Your Computers

You should configure each computer that will connect to your Q-One to obtain an IP address automatically. The instructions below are for computers running Windows XP. For computers running another operating system, please refer to your network documentation.

1. On **Start** menu, click **Control Panel**, and then double-click **Network Connections**.
2. If the computer connect wirelessly, right-click the **Wireless Network Connection** icon, and then click **Properties**. Otherwise, right-click the **Local Area Connection** icon, and click **Properties**.
3. On the **General** tab, find **This connection uses the following items**, scroll down and double click on **Internet Protocol (TCP/IP)**.
4. Make sure the options **Obtain an IP address automatically** and **Obtain DNS server address automatically** are selected.

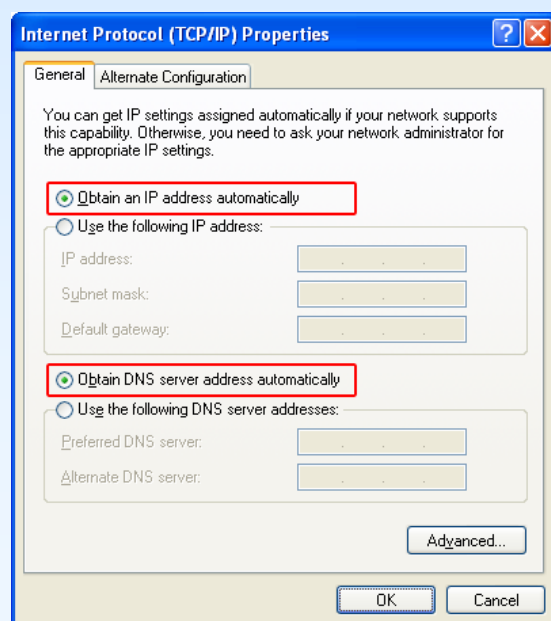


5. Click **OK** to close the properties window.

For PPPoE users


If your Internet connection uses Point-to-Point Protocol over Ethernet (PPPoE), you will need to disable the login window, since it will be handled by your Q-One.

1. On **Start** menu, click **Control Panel**, and double-click **Internet Options**.
2. On the **Connections** tab, select **Never dial a connection**.

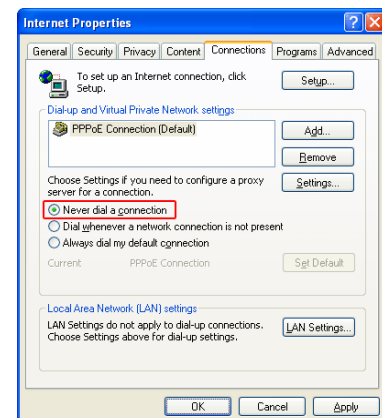

2 Connect to Your Modem

1. Using an Ethernet cable (Cat 5 or higher), connect your DSL/cable modem to the WAN port on the Q-One's back.
2. Connect the AC adaptor to the power port on your Q-One and plug into an electrical outlet.
3. Turn your modem off and then on again. Wait until the modem's Internet light is steady before continuing.
4. Turn your Q-One on by pressing the front panel's button.

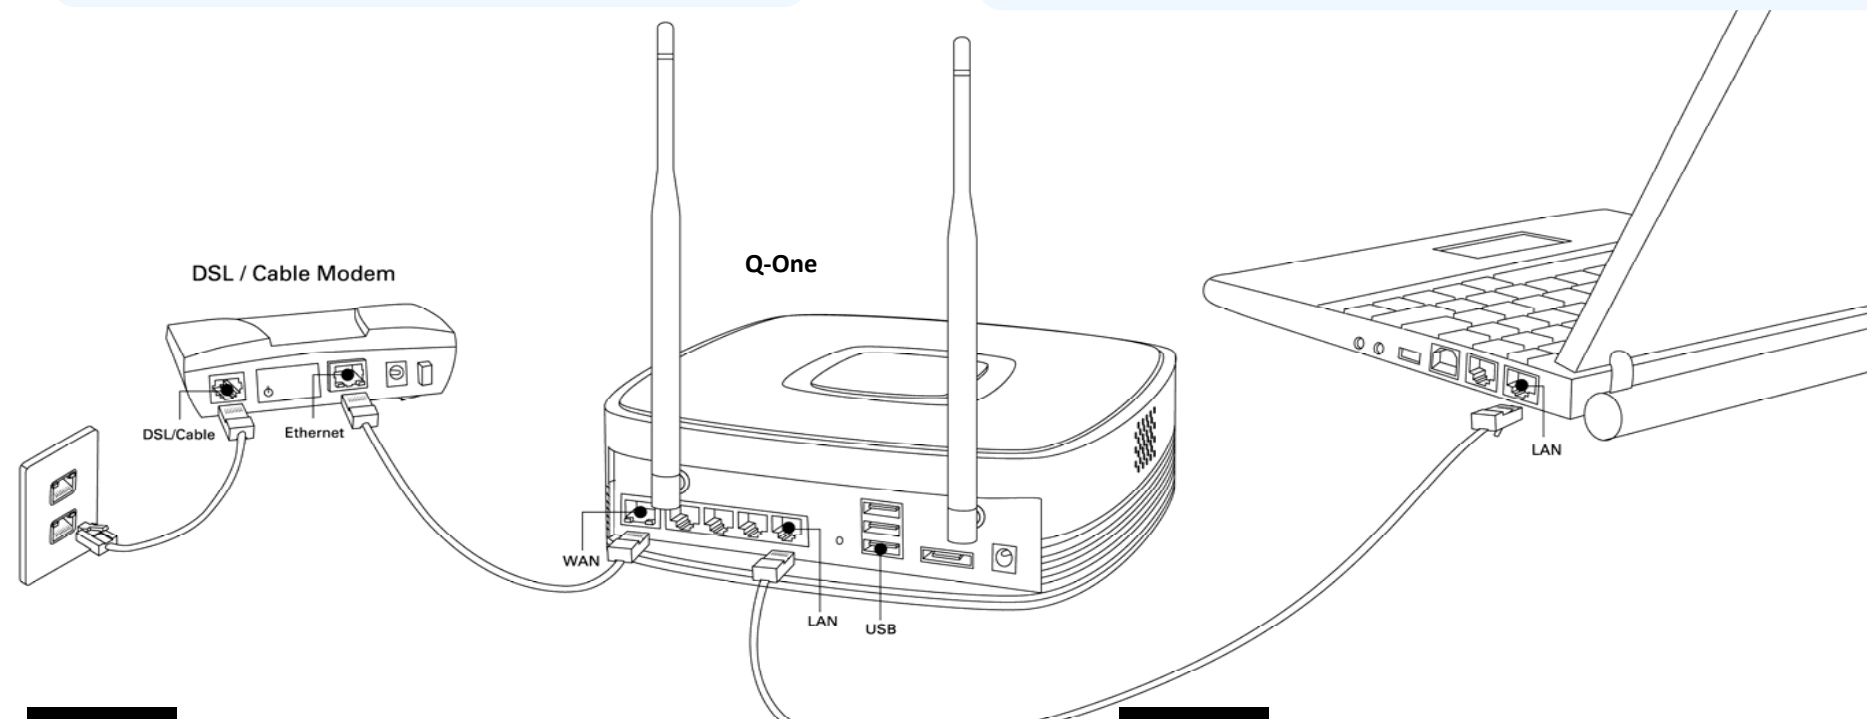

4 Complete the Personal Server's Setup Wizard

1. On a computer connected to your Q-One, open a browser window. In the address bar, type **http://Q-One:8090/** or **http:192.168.10.1:8090**.
2. Log in to the administrative interface with username "admin" and password "admin".
3. In the navigation menu, click **Basic Settings**.
4. Complete the setup wizard to configure your Q-One for Internet connectivity.

Note: For security, please change the administrative password after logging in for the first time.

3 Connect Your PC to Your Q-One

Connecting through an Ethernet cable

1. Plug an Ethernet cable (Cat 5 or higher) into one of the four LAN ports on the Q-One's back, and plug the other end into your computer's LAN or Ethernet port.
2. If the computer is off, turn it on.

Connecting wirelessly (Wifi model only)

1. If the computer is off, turn it on.
2. Using your wireless network browser, locate and connect to your Q-One's wireless network at the network name (SSID) "Q-One".

5 Check Your Connectivity

After you finish the setup wizard, check whether you can connect to the Internet by trying to visit a Web site. If you cannot access the Web, you may need to change your Q-One's network settings. In the address bar, type **http://Q-One:8090** or **http:192.168.10.1:8090**, log in as "admin", and click **Network** on the main menu. Please refer to the Q-One User's Guide for information on network settings. Complete WAN Basic Setting referring to your ISP's service to select the internet option like static IP, dynamic IP, PPPOE etc. and Complete Wireless Network Basic Setting. Finally, click **MANAGEMENT** on main menu, go to **Account**, then **WAN Access**, then Click **ENABLE** and **SAVE**.